



FUSION **PLANKS**
by signature®

Imagine a single design piece not only bold on its own,
but with the ability to melt into its counterparts and
change the statement, the look, the narrative depending
on what you need.

The new Fusion planks collection is formed as one.

CORE CONNECT COMPOUND

CORE

The base, the foundation of it all.



CORE zinc 6-000-000PL
CORE lead 2-000-000PL
CORE carbon 1-000-000PL

double herringbone

CONNECT

The amalgamation of the foundation and the highlight coming together.

CONNECT carbon red 1-023-035PL

ashlar



COMPOUND

The final unification, the explosion of vibrancy
to create the reaction desired.



COMPOUND lead aqua 2-021-031PL
COMPOUND carbon sand 1-007-099PL



CORE
CONNECT
COMPOUND

The synergy between CORE,
CONNECT and COMPOUND
make for a beautiful alliance,
a symphonic flow.


COMPOUND lead green 2-048-002PL
CONNECT lead green 2-048-002PL
CORE lead 2-000-000PL



NIGHT
IS JUST
A FUSION
OF DREAMS

– Mirela Stancu, Contopire

CORE zinc 6-000-000PL
CONNECT zinc teal 6-046-021PL
COMPOUND zinc teal 6-046-021PL
CORE lead 2-000-000PL
CONNECT lead magenta 2-060-062PL
COMPOUND lead magenta 2-060-062PL
CORE carbon 1-000-000PL
CONNECT carbon navy 1-019-040PL
COMPOUND carbon navy 1-019-040PL



True to definition, Fusion planks can complement Signature's other flooring options, such as our vinyl plank collections.

CONNECT zinc azure 6-040-036PL
COMPOUND zinc azure 6-040-036PL

SUSTAINABILITY

Fusion planks are GreenTag® GreenRate Level A certified for Green Star projects.


Fusion planks can also contribute to points in the WELL Building Standard.

EPDs and Declare labels available upon request.



SHAPES® BY SIGNATURE

Fusion planks can be ordered in 10 Shapes® by Signature. 50m² minimum applies.

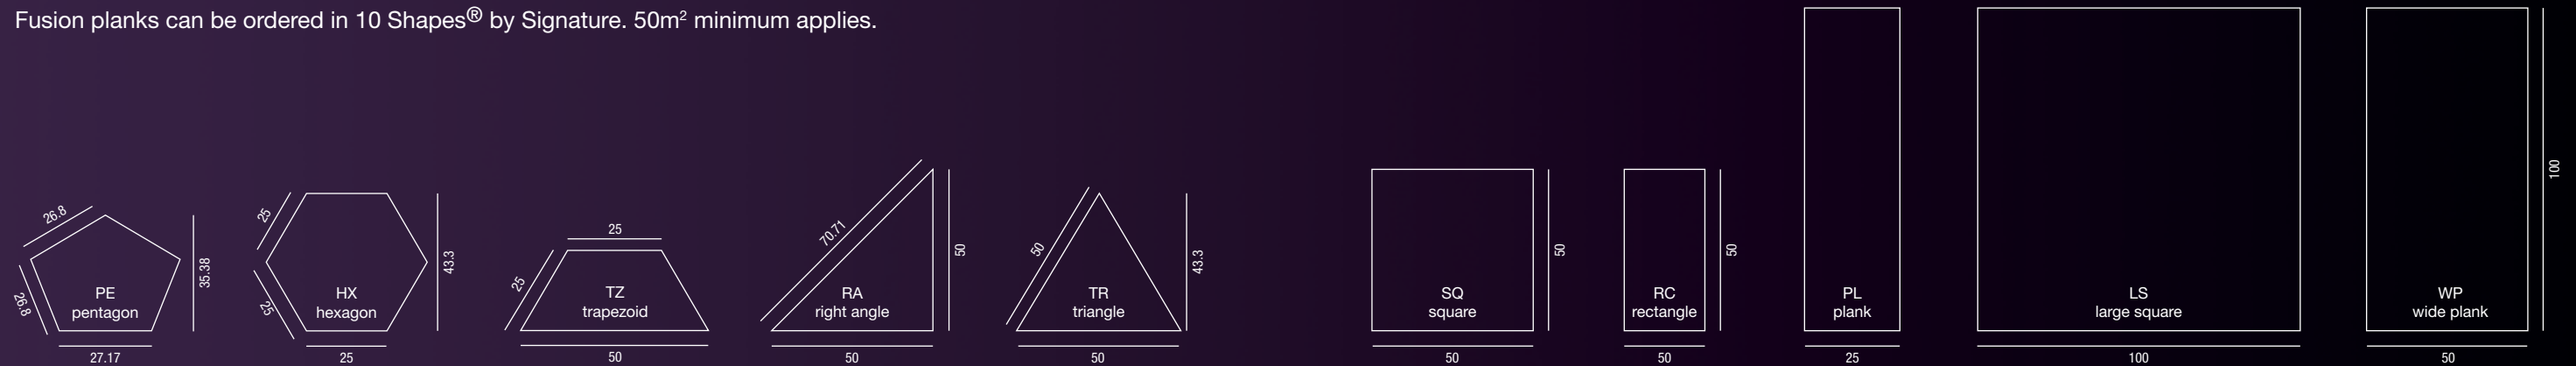

Specifications are subject to manufacturing tolerances and may be changed without prior notice. Dye lots may vary in colour from sample and between production lots. All product purchases are subject to signature floorcoverings standard terms and conditions of sale. Please refer to our installation guideline, maintenance manual and warranty document for further clarification. As per competition & consumer act (CCA): "Our goods come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure and compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure." 01/2020©

WITH THANKS TO OUR
FURNITURE SUPPLIERS

stylecraft

AJAR



CORE lead 2-000-000PL

ashlar

CORE

CONNECT

Width of colour stripe varies across planks.



CORE ZINC 6-000-000PL	CORE LEAD 2-000-000PL	CORE CARBON 1-000-000PL
------------------------------------	------------------------------------	--------------------------------------



CONNECT ZINC YELLOW 6-082-003PL	CONNECT ZINC TEAL 6-046-021PL	CONNECT ZINC AZURE 6-040-036PL	CONNECT LEAD AQUA 2-021-031PL	CONNECT LEAD GREEN 2-048-002PL	CONNECT LEAD MAGENTA 2-060-062PL	CONNECT CARBON RED 1-023-035PL	CONNECT CARBON NAVY 1-019-040PL	CONNECT CARBON SAND 1-007-099PL
--	--	---	--	---	---	---	--	--

Signature

COMPOUND



COMPOUND ZINC YELLOW 6-082-003PL	COMPOUND ZINC TEAL 6-046-021PL	COMPOUND ZINC AZURE 6-040-036PL	COMPOUND LEAD AQUA 2-021-031PL	COMPOUND LEAD GREEN 2-048-002PL	COMPOUND LEAD MAGENTA 2-060-062PL	COMPOUND CARBON RED 1-023-035PL	COMPOUND CARBON NAVY 1-019-040PL	COMPOUND CARBON SAND 1-007-099PL
---	---	--	---	--	--	--	---	---

construction
yarn/fibre
pile weight
pile height
gauge
tile size
total thickness
carton size
total weight
dimensional stability
backing
electrostatic propensity
fire rating ISO 9239 1
recommended adhesive
installation method

availability
Comfi Bak® option
customise Shapes™
traffic
warranty
fire
stain/soil

sustainability

core

multi-level loop
solution dyed nylon
580g/m²
4mm
1/12
250mm x 1000mm
6.5mm
5m²
4.58 kg/m²
<0.15%
Thermo Bak™
<2.0kv
>4.5 kw/m² critical radiant flux
RLA Polymers GS300
ashlar, herringbone,
basket weave
in stock
50m² minimum
50m² minimum
extra heavy duty commercial
15 year limited
suitable all areas
Ultra Gard (thermo chemical
treatment)
GreenTag® Green Rate Level A
EPDs and Declare labels
WELL eligible

connect

multi-level loop
solution dyed nylon
612g/m²
4mm
1/12
250mm x 1000mm
6.5mm
5m²
4.61 kg/m²
<0.15%
Thermo Bak™
<2.0kv
>4.5 kw/m² critical radiant flux
RLA Polymers GS300
ashlar, herringbone,
basket weave
in stock
50m² minimum
50m² minimum
extra heavy duty commercial
15 year limited
suitable all areas
Ultra Gard (thermo chemical
treatment)
GreenTag® Green Rate Level A
EPDs and Declare labels
WELL eligible

compound

multi-level loop
solution dyed nylon
646g/m²
4mm
1/12
250mm x 1000mm
6.5mm
5m²
4.65kg/m²
<0.15%
Thermo Bak™
<2.0kv
>4.5 kw/m² critical radiant flux
RLA Polymers GS300
ashlar, herringbone,
basket weave
in stock
50m² minimum
50m² minimum
extra heavy duty commercial
15 year limited
suitable all areas
Ultra Gard (thermo chemical
treatment)
GreenTag® Green Rate Level A
EPDs and Declare labels
WELL eligible



Our manufacturing process ensures no two planks are the same.
Please note that there may be batch variations from different dye lots.
Comfi Bak® - optional backing for enhanced comfort. 50m² minimum order applies.
Available in Shapes by Signature®. 50m² minimum order applies.



innovation & inspiration

Signature[®]
floorconcepts

au 03 9401 0888
nz 0800 150 555
signaturefloors.com.au
signaturefloors.co.nz

Limitations of the printing process
may not represent the actual colour
of the product. Please refer to
samples for final colour selection.

Terms & conditions: Specifications are subject to manufacturing tolerances and may be changed without prior notice. Product may vary in colour from sample and between production lots. All product purchases are subject to Signature Floorcoverings Standard Terms & Conditions of Sale. Please refer to our Technical Information Manual, Maintenance Guide & Warranty Guide for further clarification. © Signature Floors 01/2020

See detailed installation guidelines & warranty info online.